



# Transducer Performance Documentation

Transducer Detail		Pulser/Receiver		Setting	
Model	V309	Model	XTR-2020	Pulse Mode	Spike Pulse
S/N	838	S/N	2106	HPF	15 MHz
Frequency	5 MHz	Analysis		LPF	1 MHz
Diameter	0.5"			TA software	Gain
Focus	Flat	Pulse Echo Mode		Damping	100Ω
Connector	UFH	Target Lucite Back Surface		Pulser Voltage	250 V

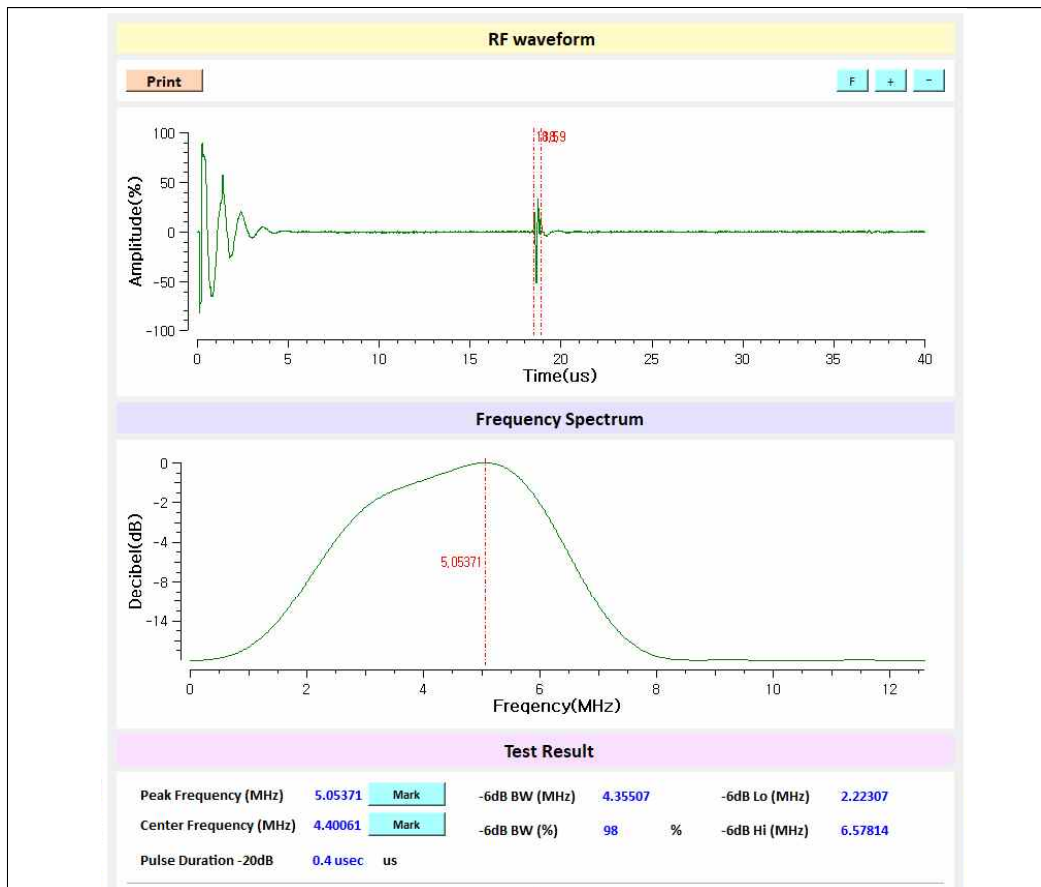

P/R setting



Measurement

Inspected by S.M. Park  
Date: 11/17/2021